

BALEWRAPPER X2 *Laying down the line.*

Optional Equipment

Enhance the power of X2 with the numerous useful options available. Many of these options can be added in the field with easy set-up instructions.



Quick-Start Power Jack



Remote Control



Hydraulic Drive



Film Shutdown Switch



Twin Wrap Kit

TL6500AX2



DOUBLE YOUR EFFORTS

The TLA6500AX2 can wrap two stacked bales, saving both film and space.



Guide Rollers



Night Working Light Kit

Specifications

TL5500AX2

Overall Length25'-5"
 Width9'
 Height9'
 Weight5,800 lbs.
 Tires(4) 11L x 15 8ply
 Bale Size:
 Roundup to 5'-6"
 Squareup to 3' x 3' x 5'-6"
 Film Stretcher30" x 55%
 Second Film Tensioner Standard
 Power13hp Honda

Shipping Dimensions

Length16'-5"
 Height9'
 Width without Guards8'

TL5500SX2

Overall Length25'-5"
 Width9'
 Height9'
 Weight5,800 lbs.
 Tires(4) 11L x 15 8ply
 Bale Size:
 Roundup to 5'-6"
 Squareup to 3' x 3' x 5'-6"
 Film Stretcher30" x 55%
 Second Film Tensioner Standard
 Power13hp Honda

Shipping Dimensions

Length16'-5"
 Height9'
 Width without Guards8'

TL6500AX2

Overall Length25'-5"
 Width10'-8"
 Height10'-7"
 Weight8,150 lbs.
 Tires(4) 12.5L x 15 10ply
 Bale Size:
 Roundup to 7'
 Squareup to 3' x 3' x 6' by 2 high
 Film Stretcher30" x 55%
 Second Film Tensioner Standard
 Power13hp Honda

Shipping Dimensions

Length18'
 Height10'-4"
 Width without Guards10'-8"

Available at:

Manufactured by:

TUBE•LINE™

MANUFACTURING LTD.

3928 Steffler Road RR #4
 Elmira, ON N3B 2Z3
 Tel. (519) 664-0488 Fax: (519) 664-0492
 Toll Free: (888) 856-6613
 sales@tubeline.ca www.tubeline.ca

BALEWRAPPER



Productivity just multiplied.



TUBE·LINE™
MANUFACTURING LTD.

Laying Down the Line.

Patented system with more patents pending.

BALEWRAPPER

TL5500AX2 TL5500SX2 TL6500AX2



Quick-Start Power Jack

Raise the hydraulic jack to level the roller bed, preventing air pockets between bales. When three bales are wrapped the jack is released.

From start to finish, innovation has come full-circle.


The Tube-Line X2 is the new industry standard, focusing on the operator's needs first. The X2 gives you more control, improved features and easier operation. Wrapping bales gives livestock better quality feed and now Tube-Line gives you a better wrapper.

The X2 has added features that re-define efficient wrapping. Starting a new row now takes only one bale. Switching from round to square bales is a quick lift of the roller bed with an over-center lever. The engine and control panel are placed neatly together. Both safety guards slide away for easy access. And, the final bale push-off is now only a two-step process.

X2 keeps you in the field with the performance you need to beat bad weather. With the proven automatic operating cycle, Tube-Line makes balewrapping a one-person job. Take advantage of the X2 by wrapping up efficiency from start to finish.

TUBE•LINE™
MANUFACTURING LTD.

Laying Down the Line.

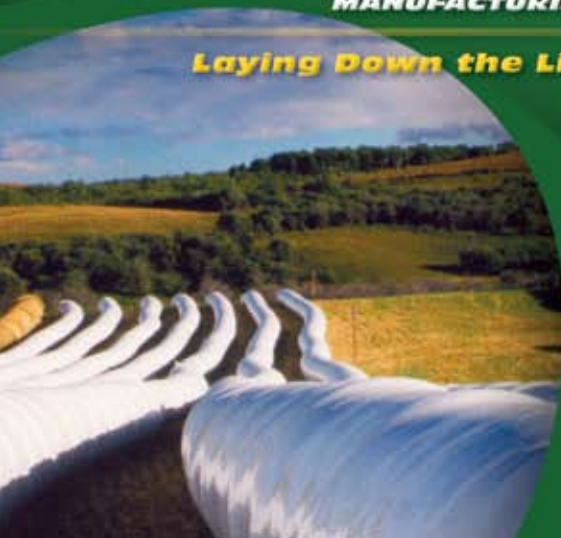

* Quick-start Power Jack is an optional accessory.

wraps up to
2 bales
a minute
 120 bales/hour



New X2 Features



Engine Placement

Repositioned engine sits below main controls, making wrapper easier to operate



Roller Bed Locking Lever

Switching from round to square is simple by raising and lowering roller bed with over-center lever that locks into position



Fold-Away Push Off Arms

Hinged arms are always ready for final bale push off without any pins



Roller Wheels on Ram

Reduced friction allows push ram to move with less wear on the frame



Larger Fuel Tank

Larger capacity means filling up less often which makes the job go faster.



18 Amp Charging System

Improved charging system eliminates need for additional alternator, making light kit more affordable

Plus:

- Lower Table Height
- Roll-away Safety Guards
- Advanced Tension System
- Film Overlap Control
- Roller Bearings on Kingpin
- Hydraulic Brake Design
- Treaded Hoop



Final Bale Push Off

Tube-Line has solved the hassle of the last bale in a row. The patented system allows the last bales to be removed safely and without damage.



Set-up & Towing

Unlike other wrapping systems, Tube-Line's adjustable tongue is located opposite the end the bales are wrapped, making moving and repositioning a simple task.

Safety

The safety cages are interlocked with the automatic cycle. When the cage is open the Tube-Line will not run. (Automatic models only)

The Balewrapper can be shut down quickly from the main panel or with the remote control option from 100 feet away.